




System Interface Products

iRPM – intelligent Redundant Power Module



Redundant Power Inputs, LED indicators

How to order an iRPM – Redundant Power Module

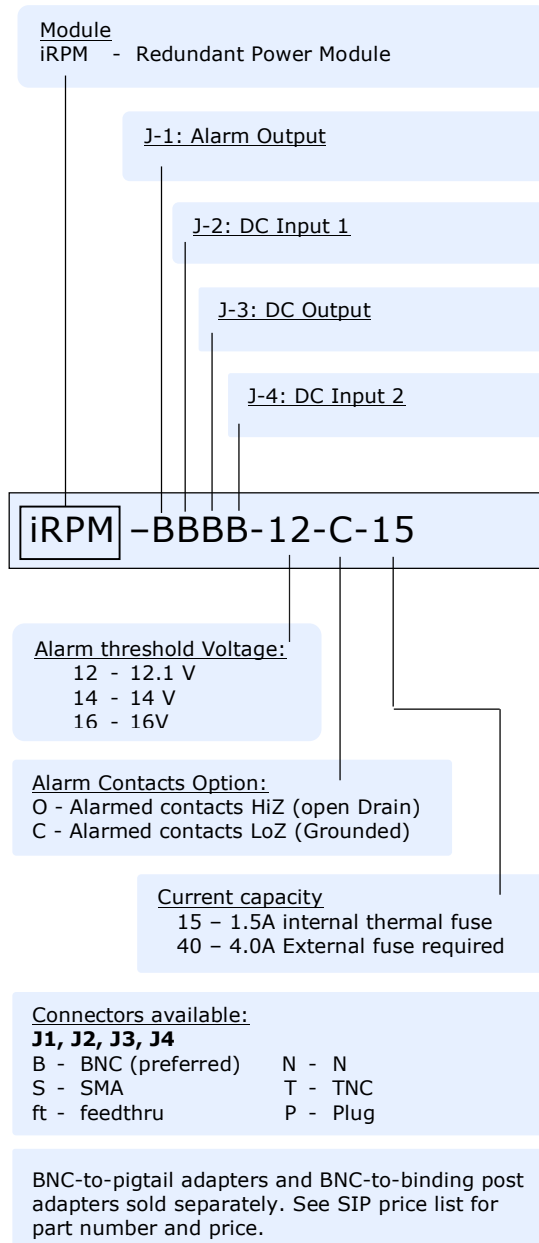

Orbital Design:

While modern power supplies are sophisticated designs with superlative performance, they remain the device with the shortest MTBF. To mitigate this threat, Orbital Research introduces the iRPM (Intelligent Redundant Power Module), to provide one for one (1:1) DC power redundancy. This simple low cost module provides an extremely reliable passive method of providing automatic backup power for the majority of satellite system devices. It has two inputs, one for each power supply.

Since the iRPM uses our standard SIP chassis, it integrates easily into stacks, plates or rackmountable chassis with our other modules.

Switch Mechanism

The Orbital iRPM uses *Ideal Diode FETs* to switch between the primary and backup power supplies. The *Ideal Diodes* have very low resistance and thus have little or no voltage drop from the input to the output.

Alarm

Alarm output and Status LEDs are used to indicate the stated of the Output Power. The Alarms indicate which voltage input has failed, therefore, allowing replacement of failed power supplies in live systems, avoiding the need to take the entire system off line.

Orbital Features:

Functional

- Will operate with Orbital SIP modules, LNBS, BDCs, BUCs, Receivers and Modems
- O-ring sealed connectors and Hylomar sealed enclosure

Structural

- The system mounts on the back of the rack, out of the way. This makes this product ideal for flyaway systems.
- Diode protection to prevent accidental reverse polarity DC.
- Solid billet milled box and lid.
- Blue Anodized finish, MIL-STD-595
- RoHS & REACH compliant

Sales contact:

David Zuvic


Tel: (604) 856-0305

dzuvic@orbitalresearch.net

www.orbitalresearch.net

SIP: iRPM – Redundant Power Module Specifications

Orbital iRedundant Power Module Mechanical Dimensions + Functional Block Diagram Viewed from the top

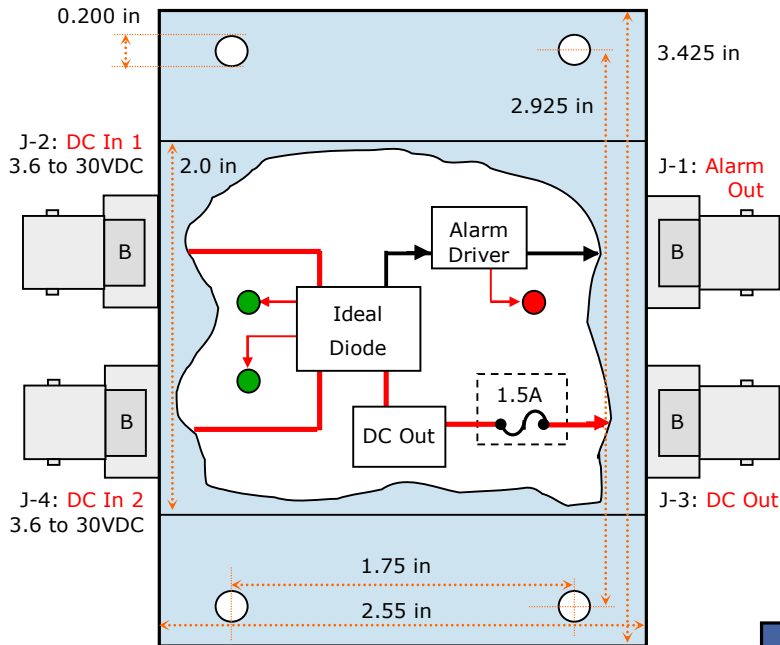

Electrical Specifications

Power Capacity: 3.6 to 30 VDC,
1.5 A (standard)
4.0 A (optional)

Voltage Threshold: 12.1 VDC
14 VDC, or
16 VDC

Operational ALARM Contacts Options:

O: Alarmed contacts HiZ (Open Drain)
C: Alarmed contact LoZ (Grounded)


**See Reference Manual for full
information on Alarm output
specification and installation.**

Environmental Specifications

Operating Temp: -40 to +85° Celsius
Relative Humidity: Up to 100% condensation
and frost

Mechanical Specifications

Measurements: Tolerance ± 0.005 in.
Size (case): 3.425l x 2.55w x 0.88h in.
Size (with conn): 3.425l x 3.8w x 0.88h in.
Weight: 5 oz
Paint / Color: Blue Anodized finish
MIL-STD-595
Mounting holes: 0.200" (5mm)
Accepts standard
rackmounting screws:
10/32 or 10/34
Compliances: RoHs & REACH Compliant

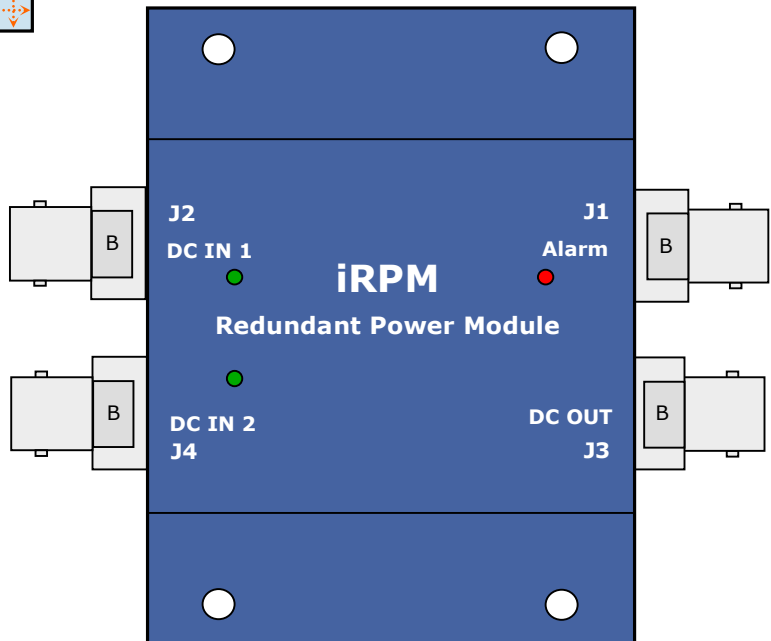

Switching Power Supplies

See PS1 or PS2 brochure for ordering
information

LED Indicators

Green:	Power supply is functioning properly.
Red – Single Flash	Primary power supply is not functioning properly (below threshold)
Red – Double Flash	Secondary Power supply is not functioning properly (below threshold)

