




C-BAND PLL BLOCK DOWN CONVERTER



10 to 40 dB gain, 250 to 800 MHz bandwidth

How to order a 3300 Series C-Band PLL BDC

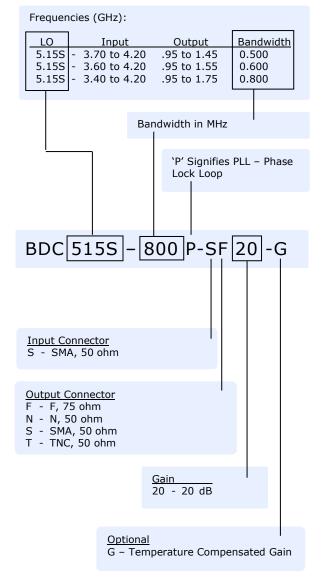

Orbital Flexibility:

With an LNA that covers your satellite, simply order a custom Orbital BDC to cover the bandwidth that you need. You can specify input and output connector types, external DC input, coaxial DC input, or dual power option. Most importantly, we can customize your gain to optimize compression point and noise distribution. Just tell us your needs and we will build a mass-custom solution in a unique, cost effective way.

"Mass-Custom" Solution

Orbital starts with a proven performance product that is extremely well engineered with the development costs amortized over hundreds of thousands of units and the parts costs reduced by volume discounts. We then customize the mass produced LNB into what you want at 1/100 the cost of designing and building from scratch.

Orbital Features:

Custom Engineering

- Begin with the low noise figure of a proven quality LNB
- Optimize Input and Output for superior VSWR
- Modify LO frequencies preserving phase noise and stability
- Modify and tune RF & IF filters for optimum response
- Tune for very low bandpass ripple
 - Optimize Gain distribution for your system parameters

Environmental

- O ring sealed connectors for weather resistant operation
- RoHS & REACH compliant

Options

- External DC connector F, N, BNC or Feedthrough
- Special Dual DC option via output coax and ext DC port
- Temperature Compensated Gain Variation
- Full test documentation available


Sales contact:


sales@orbitalresearch.net

1 604 419-8585

www.orbitalresearch.net

Orbital 3300 Series C Band PLL BDC Specifications

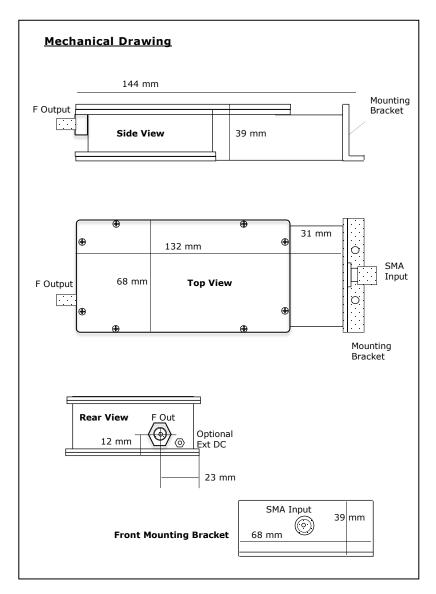

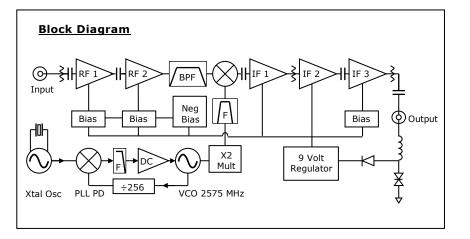

Orbital Research Ltd. designs and builds products for satellite communications applications. Orbital sells directly and from its website www.orbitalresearch.net. Copyright © 2017 Genie in the Bottle Enterprises Inc. All rights reserved. Specifications subject to change without notice.

Electrical Specifications

Electrical Spec		
Input Frequency:	3.4-4.2, 3.6-4.2, 3.7-4.2 GHz.	
Bandwidth: Noise Figure: Input VSWR: LO Leakage:	Other ranges available up to 800 MHz 10 dB max 1.5 : 1 typical -45 dBm max	
Output Bandpass: Output VSWR: LO Stability: 1 dB Comp pt: 3rd Order Intercept:	950 up to 1750 MHz 1.5 : 1 typical ±5 kHz +10 dBm minimum +20 dBm minimum	
LO Leakage: Image Reject: Phase Noise:	-45 dBm max 45 dBm -80 dBc/Hz @ 1 kHz -85 dBc/Hz @ 10 kHz -95 dBc/Hz @ 100 kHz	
Gain Options: Ripple: Temperature Co	20 dB 1dB p-p max per 36 MHz segment ompensated Gain Variation (optional) <u>+</u> 0.75 dB max over frequency band and -10 to +55 °C temp range	
Power DC Input: Filtering:	12 to 24 VDC, 250 mA typical Transient, over and reverse voltage protected	
Mechanical Specifications		

Size:	144 x 68 x 39 mm
	5.7 x 2.7 x 1.5 inches
Weight:	approx. 550 grams, 19.4 ounces
Paint:	Brilliant White Enamel
RoHs & REACH Compliant	

Environmental Specifications

Operating Temp:	-40 to +60°Celsius
Relative Humidity:	to 100% condensation & frost

Enhancing Standard Product

Mass-production means low-cost, reliable, repeatable products. Engineers design these products well within margins on component specifications so that individual tuning is not required to meet desired specifications.

As we modify product, we also tweak the design and components to optimize them for their inherent capabilities. Effectively, we bring out the full potential of the product by adjusting components to their full capability.

